


RSS-4000

The RSS-4000 Synthetic Track Surface (sandwich system) is a 100% polyurethane-based track system that provides world-class performance. The dual-durometer construction begins with a shock-absorbing paved-in-place base mat, topped with a flow-applied, two-component polyurethane wearing course. The embedded rubber particles provide increased rebound properties and traction in a resilient and durable surface.

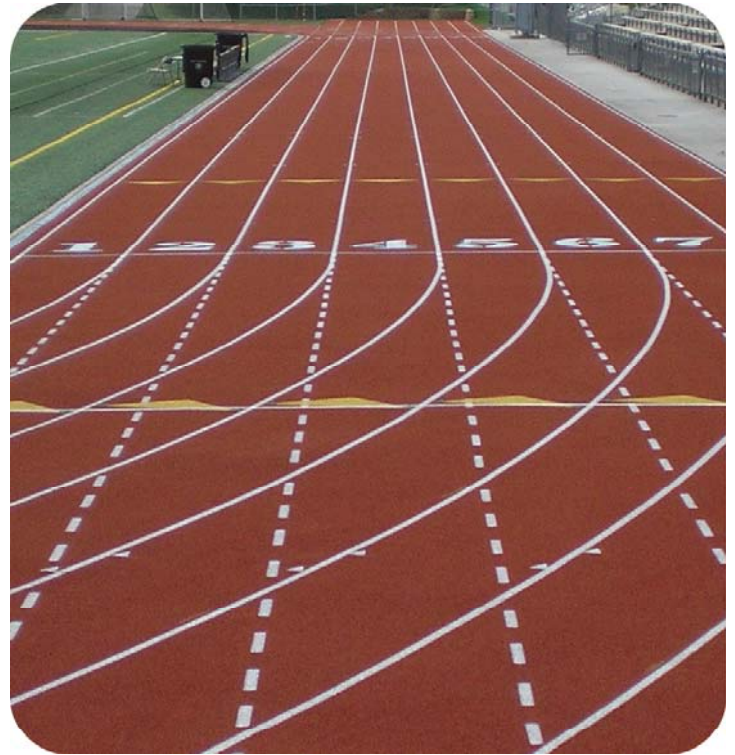

The RSS-4000 Track System consists of:

- Embedded 1-3mm EPDM rubber granules provide excellent resilience and traction
- 4-5mm two-component flow-applied polyurethane flood and chip wearing course provides exceptional rebound energy
- 9-10mm polyurethane-bound paved-in-place black base mat provides optimum shock-absorption
- Installed using state-of-the-art fully automatic continuous mixing equipment
- Ideal for all levels of competition, including international and professional

